

Battery Series

Model: PRT-B





5/2 Day Programming Mode	Y	Supply	2x AAA
7 Day Programming Mode	Y	Rating	3A
Number of Heating Levels	4	Installed Dimensions (L,H,D)	99 x 86 x 24mm
Optimum Start	Y	Weight	106g
Holiday Function	Y		
Keylock Function	Y		
Temperature Hold Function	Y		
Temperature Override Limit	Y		
Frost Protection	Y		
°C / °F Option	Y		
Built In Sensor	Y		
Accuracy	+/-1°C		
Adjustable Switching Differential	Y		

Feature Table

FEATURE	DESCRIPTION	SETTING
01	Temperature Format	00 = °C, 01 = °F (Default = °C)
02	Switching Differential	01° - 03°C (Default 1.0°C)
03	Frost Mode	00 = Enabled, 01 = Disabled (01 = Default)
04	Frost Protection Temperature	07° - 17°C (Default 12°C)
05	Output Delay	00 - 15 Minutes (00 = Default)
06	Up/Down Temperature Limit	00° - 10°C (00 = Default)
07	Optimum Start	00 -03 Hours (00 = Default)
08	Rate of Change	Minutes to raise by 1°C
09	Program Mode	00 = Weekday/Weekend, 01 = 7 Day Programming

Product Dimensions (mm) & Wiring Specification

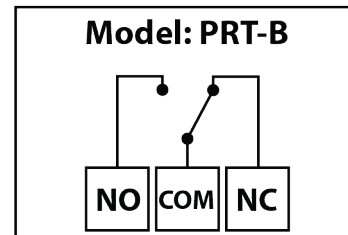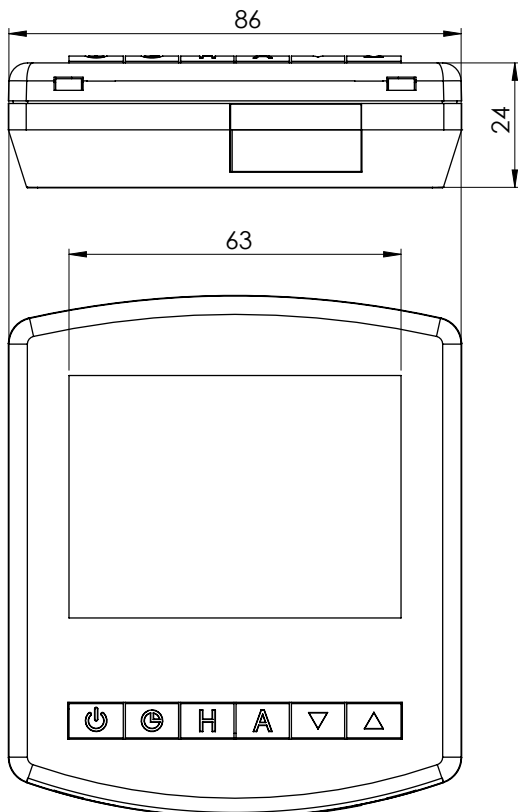

Wiring Detail

